

LE

Recessed Mounting Edge-Lit LED Exit Sign

EXIT SIGNS



FEATURES

- Edgelit exit sign for recessed mounted architectural and commercial applications
- Clear, injection molded, dual plaque acrylic with clear, white or mirror backgrounds
- High strength, extruded aluminum housing in multiple finishes
- Energy saving, long-life LED lamps exceeds brightness and uniformity requirements
- Custom printed, silk screened chevron arrows; 6" letters with 3/4" stroke
- End/ceiling/wall mount and included die-cast aluminum canopy
- Maintenance-free nickel-cadmium battery with fully automatic charger
- Temperature range: 20°C to 30°C (68°F to 86°F)
- UL 924 Listed
- Special Worded signs certified to UL48-Electric Signs

ORDERING INFORMATION

LE								
MODEL	MOUNTING	FACES	LETTER COLOR	DIRECTIONAL ARROWS	TRIM/HOUSING FINISH	OPERATION	SELF-DIAGNOSTIC	OPTIONS
LE	C Ceiling mount W Wall mount E End mount	S Single D Double* <small>*Not for use with wall mounted models.</small>	R Red G Green	X No arrows EXIT R Right arrow* EXIT L Left arrow* <EXIT D Double arrows <EXIT C L/R arrows** <EXIT/EXIT <small>*Not for use with double face models. Use "C" L/R arrow designator ** Double face models only. Provides reversible right or left arrow indicator</small>	N Satin Aluminum W White C Chrome B Black S Satin brass Z Dark Bronze	A AC only E Emergency	Blank None I Spectron self-testing/self-diagnostic electronics* <small>*For use with emergency models only.</small>	See "Options" section

POWER CONSUMPTION

	SINGLE FACE	DOUBLE FACE
Red AC Only Models	2.2W	3.7W
Green AC Only Models	2.5W	4.4W
Red Emergency Models	3.3W	4.7W
Green Emergency Models	3.6W	5.2W

Wattage figures include LED lamps, transformers and electronics power requirements.
Power factor, average: .80 (lagging)

ACCESSORIES

MODEL	DESCRIPTION
URK	Universal rough-in kit
URK2C	Universal 2-circuit rough-in kit ^{a,b,c}

^a For use with AC models only.
^b Rough-in kit may not be ordered separately on models specified with -24K option.
^c Must be ordered in conjunction with -2C option on exit sign.

To Order Rough-In Kit Separately

To order rough-in kit only for early installation, add "-XK" option suffix to exit model number and order "URK" or "URK2C" kit separately.

ELECTRONICS

- Transformer isolation, surge, transient, and low voltage disconnect protection
- 90 minute emergency operation
- Reverse polarity, short circuit and AC-lockout protection
- 120/277VAC 60Hz operation, test switch and LED AC-On indicator light

OPTIONS

MODEL	DESCRIPTION
SW	Special Wording ¹²
2C	2-circuit operation ^{2,5}
FAP	Fire alarm panel interface ^{3,5,6}
FM	Flasher module ^{1,6}
AF	Audible/Flasher module ^{1,6}
DC	Remote DC Operation ^{2,4,5}
24K	220-240VAC, 60 Hz. operation ⁹
XK	Recessed mount exit sign less rough-in kit ^{7,9}
W	White plaque background
M	Mirror plaque background ⁸
8L	8 inch letter plaque (red letters only) ^{10,11}

¹ For use with emergency models only.

² For use with AC models only.

³ Operates with 24-volt AC or DC fire alarm panels.

⁴ For emergency illumination of sign from remote 6-24 VDC power sources.

⁵ -DC option may not be specified with -2C or -FAP options.

⁶ -AF, -FM and -FAP options may not be specified together.

⁷ Allows ordering of rough-in kit separately for recessed mount (LE) models. See "Accessories".


⁸ For use with single face models only. Standard on double face models.

⁹ Rough-in kit may not be ordered separately on models specified with -24K option.

¹⁰ LE exit models with 8" plaques registered under NYC-BEC Calendar Number 42135 for use in New York City.

¹¹ Single face LE exit signs specified with the -8L option are supplied without backgrounds. Double face models specified with the -8L option are supplied with mirror backgrounds.

¹² Enter Special Wording choice from page 963; example: SW41. Special wording option not available with 8" letter plaque. Some special wording signs not available with directional arrows.

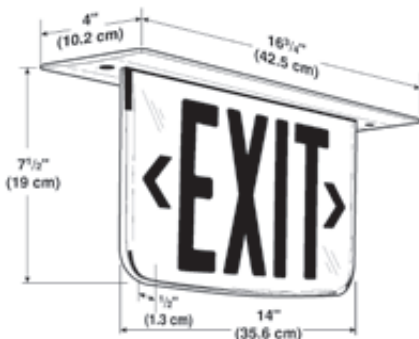

SE SEMPRA® SERIES SPECIAL WORDED SIGNS

Dual-Lite's cast-aluminum SE Series exit signs feature an option for custom or standard special-wording. The images below represent a sample of standard special-worded signs available. Please review the SE Series specification sheet for a complete list of standard special-worded signs or contact the factory to request your custom special-worded sign.



SW65 (Makhraj Arabic)



SW10



SW13



SW40



SW47



SW5



SW101



SW7



SW97



SW22



SW31



SW45



SW37



SW98



SW9



SW30



SW69



SW48



SW73



SW4

LE/LES SERIES SPECIAL WORDED SIGNS

LES Series architectural surface-mounted LED edge-lit exit signs feature an option for standard or custom special-wording. The images below represent standard special-worded signs available for the LES Series. The artwork and silk-screening for the standard signs shown below were previously developed therefore pricing for these special-worded signs do not incur a setup charge.

If your special-worded requirements do not appear on this page, please contact the factory to request your custom special-wording sign. Custom special wording signs incur a one time set-up charge for each development.

STANDARD SPECIAL WORDING SIGNS WITH DIRECTIONAL ARROWS



SW118



SW41 (Arabic/Exit)



SW13



SW10



SW69



SW11

STANDARD SPECIAL WORDING SIGNS WITHOUT DIRECTIONAL ARROWS



SW4



SW3



SW31



SW2

