

### FEATURES

- Utility luminaires with battery backup for commercial applications
- Sturdy, vandal-resistant, die-cast aluminum backbox in dark bronze finish
- Three styles - full cutoff wallpack, perimeter wallpack or canopy light
- Normally-on operation with efficient 42Watt compact fluorescent lamp
- Maintenance-free nickel-cadmium battery with fully automatic charger
- Temperature range: -20°C to 40°C (-4°F to 104°F)
- UL 924 Wet Location Listed (NRG, WGC); UL 924 Damp Location Listed (C9)



NRG

EMERGENCY LIGHTING


### ORDERING INFORMATION



#### MODEL

- NRG304BE** Perimeter Wallpack
- C942FE** Canopy Light
- WGC42FE** Full Cutoff Wallpack


For matching non-emergency luminaires, please see pg. 549 (S9), pg. 543 (NRG) and pg. 532 (WGC).

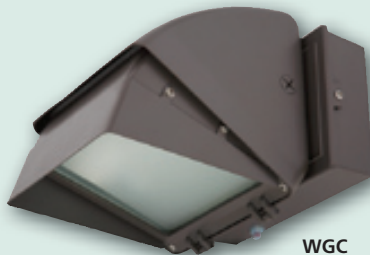

WGC



C9

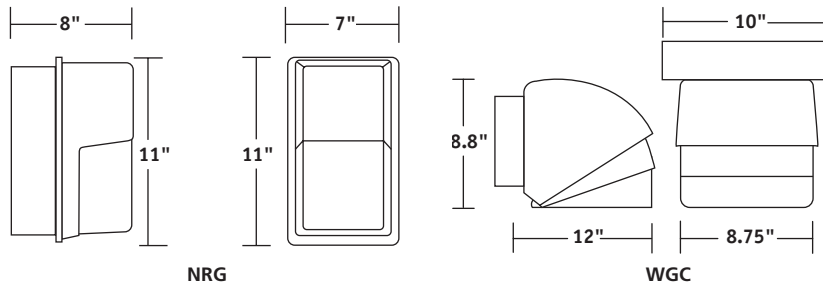

### ELECTRONICS

- Instantaneous transfer to emergency power; suitable for use with switched circuits
- Battery heater included
- 90 minute emergency operation
- 120/277VAC 60Hz operation, test switch and AC-On indicator light

