

Die Cast Exit



EXIT SIGNS

FEATURES

- Die-cast aluminum exit sign for commercial or light industrial applications
- Master/remote - SEMR (2 sign set) and recessed - SERS models available
- Universal end/ceiling/wall mount and included die-cast aluminum canopy
- Energy saving, long-life LED lamps exceed brightness and uniformity requirements
- Completely concealed break out chevron arrows; 6" letters with 3/4" stroke
- Maintenance-free nickel-cadmium battery with fully automatic charger
- Temperature range: 0°C to 40°C (32°F to 104°F)
- UL 924 Listed; UL 924 Damp Location Listed (SE models only)
- U.S. Patent No. 6,050,013 and 6,082,031.
- Special Worded signs CSA certified to UL48-Electric Signs

ORDERING INFORMATION

MODEL	FACES	LETTER COLOR	HOUSING FINISH	OPERATION	SELF-DIAGNOSTIC	OPTIONS
SE (Surface)	S Single	R Red	W White	Blank AC only	Blank None	See "Options" section
SEMR (Master/Remote)	D Double	G Green	B Black	E Emergency	I Spectron self-testing/self-diagnostic electronics	
SERS ¹ (Recessed)			BN Black with Brushed Face			
			WN White with Brushed Face			

¹ Not available with Double Face

POWER CONSUMPTION

	120VAC	277VAC
Red AC Only Models	2.6W	2.6W
Green AC Only Models	2.1W	2.1W
Red Emergency Models	3.8W	3.8W
Green Emergency Models	3.5W	3.5W

Wattage figures include LED lamps, transformers and electronics power requirements. LED lamp assemblies (red or green) consume less than 1 watt.

Power factor, average: .8 (lagging)

ELECTRONICS

- Transformer isolation, surge, transient, and low voltage disconnect protection
- Pre-stripped pigtail leads with push in wiring connectors
- 120 minute emergency operation
- 120/277VAC 60Hz operation, test switch and LED AC-On indicator light
- Reverse polarity, short circuit and AC lockout protection

OPTIONS

MODEL	DESCRIPTION
SW	Special Wording ⁷
2C	2-circuit operation ^{2,5}
FAP	Fire alarm panel interface ^{1,3,5,6}
FM	Flasher module ^{1,6}
AF	Audible/Flasher module ^{1,6}
DC	Remote DC operation ^{2,4,5}
24K	220-240VAC, 60 Hz. operation
VTR	Vandal/tamper resistant option ⁸
LRBB	Sign assembly less rough-in back box - SERS only

¹ For use with Spectron® self-diagnostic models only.

² For use with AC models only.

³ Operates with 24-volt AC or DC fire alarm panels.

⁴ For emergency illumination of sign from remote 6-24 VDC power sources.

⁵ DC option may not be specified with -2C or -FAP options.


⁶ AF, FM and FAP options may not be specified together.

⁷ Enter Special Wording choice from page 963: example **SW10**. Not available with SEMR or SERS models.

⁸ Provides polycarbonate face shield and tamper-proof screws. Meets UL listing requirements for floor proximity use.


ACCESSORIES

MODEL	DESCRIPTION
VRS-3	Vandal resistant shield
FCM-R	Kit converts AC red letter models to emergency operation
FCM-G	Kit converts AC green letter models to emergency operation
PMCW	12 1/2" Pendant mounting kit (white)
PMCB	12 1/2" Pendant mounting kit (black)
WGLX	Wire guard (Wall mount)
WGLXC	Wire guard (Ceiling mount)
WGLXE	Wire guard (End mount)
RBB	Rough in back box kit

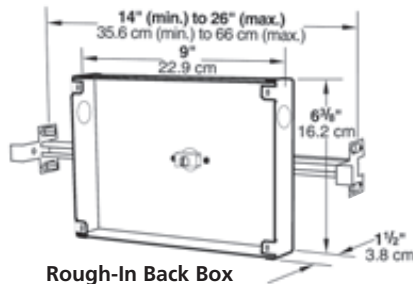

Rough-In Back Box

SERS
or
Remote Sign

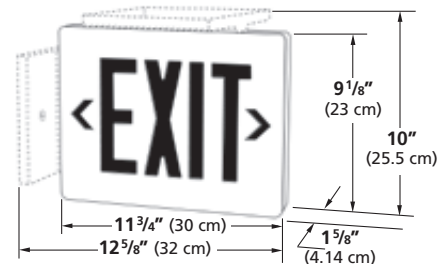

SE
or
Master Sign



SE SEMPRA® SERIES SPECIAL WORDED SIGNS

Dual-Lite's cast-aluminum SE Series exit signs feature an option for custom or standard special-wording. The images below represent a sample of standard special-worded signs available. Please review the SE Series specification sheet for a complete list of standard special-worded signs or contact the factory to request your custom special-worded sign.



SW65 (Makhraj Arabic)



SW10



SW13



SW40



SW47



SW5



SW101



SW7



SW97



SW22



SW31



SW45



SW37



SW98



SW9



SW30



SW69



SW48



SW73



SW4

LE/LES SERIES SPECIAL WORDED SIGNS

LES Series architectural surface-mounted LED edge-lit exit signs feature an option for standard or custom special-wording. The images below represent standard special-worded signs available for the LES Series. The artwork and silk-screening for the standard signs shown below were previously developed therefore pricing for these special-worded signs do not incur a setup charge.

If your special-worded requirements do not appear on this page, please contact the factory to request your custom special-wording sign. Custom special wording signs incur a one time set-up charge for each development.

STANDARD SPECIAL WORDING SIGNS WITH DIRECTIONAL ARROWS



SW118



SW41 (Arabic/Exit)



SW13



SW10



SW69



SW11

STANDARD SPECIAL WORDING SIGNS WITHOUT DIRECTIONAL ARROWS



SW4



SW3



SW31



SW2

