


UFO-3,4,5,6

Fluorescent Battery Packs

Lampak®

BATTERY PACKS

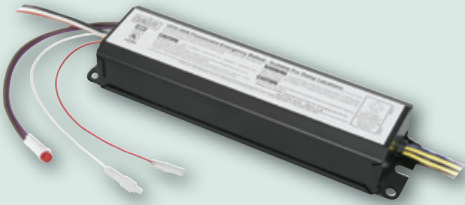

FEATURES

- Battery pack for use with linear or long compact fluorescent lamps
- Compatible with electronic, magnetic, energy saving or dimming AC ballasts
- Sealed nickel-cadmium battery ; no AC ballast required for emergency only luminaires
- Can be used with switched or unswitched luminaires
- Installation may be inside, on top of, or remote from the luminaire
- Compatible with AC ballasts having End-of-Lamp-Life feature
- 120/277VAC 60Hz operation, test switch and AC-On indicator light
- 90 minute emergency operation (UFO-5W, 120 minute emergency operation)
- Temperature range: 0°C to 50°C (32°F to 122°F); CLD: -20°C to 55°C (-4°F to 131°F)
- UL 924 Damp Location Listed

ORDERING INFORMATION

MODEL	SELF-DIAGNOSTICS	OPTIONS
UFO-3AW UFO-4W UFO-5W UFO-5AW UFO-6W	Blank None I Spectron Self-test/ Self-diagnostic Electronics ¹	CLD Extended Temperature Range ¹


¹UFO-6W Only

ACCESSORIES

MODEL	DESCRIPTION
F-WC	Wire bundle cover ¹
SPRTS	Remote test switch/charge indicator module ²

¹Encloses exposed wiring harness when battery pack is externally mounted on the lighting fixture. One required per fixture.

²Fits single-gang box.

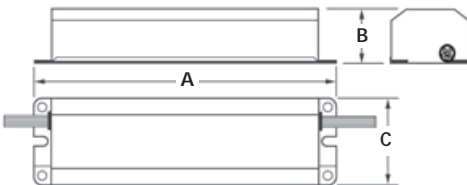

MODEL	A	B	C
UFO-3AW, 4W, 5W, 5AW	9 ³ / ₈ " (23.8 cm)	1 ¹ / ₂ " (3.8 cm)	2 ³ / ₈ " (6.0 cm)
UFO-6W, -6WI & 6W-CLD	13 ³ / ₈ " (33.9 cm)	1 ¹ / ₂ " (3.8 cm)	2 ³ / ₈ " (6.0 cm)

SPECIFICATIONS

CATALOG NUMBER	INPUT WATTAGE	OUTPUT WATTAGE	LAMP TYPE	LAMP EXAMPLES	1 LAMP LUMENS	2 LAMP LUMENS		
UFO-3AW	3.5	9.6	T8 T10 T12		350-450	--		
UFO-4W	3.5	14.4	Long CFL 4-pin Circline 4-pin		500-600	--		
UFO-5W ¹	3.5	14.4	T8 T10 T12		600-700	--		
UFO-5AW	3.5	14.4	Long CFL 4-pin Circline 4-pin		600-700	600-700 ²		
UFO-6W UFO-6WI	4.0	24.0	T8	F025, FB024 T8	1250	1100		
				F032, FB031 T8	1350	1350		
				F096 T8	1400	--		
				F017, FB016	1050	950		
			T9					
				T10				
			T12	F40T12, F40/U	1100	1100		
				F48T12/HO	1200	--		
				F96T12, HO, VHO	1100	--		
				F40T12/ES 34W	975	975		
Long CFL 4-pin	F39/36BX, PL-L 36W, Dulux L39W	1100	1100					
	F27/24BX, PL-L 24W, Dulux L27W	--	1000					
	PL-L 40W, F40/30BX, F50BX	900	--					
	PL-L 50W, Dulux L55W	900	--					
CFL 4-pin								
	2D 4-pin							
UFO-6W-CLD ³	4	24	T8	F28 2D/4P	1100	1100		
				F38 2D/4P	1000	1100		
				F032, FB031 T8	1100	1200		
				F096 T8	1200	--		
			T9	F96T8/HO	1050	--		
				F025, FB024 T8	1100	1050		
T10	F017, FB016 T8	925	850					
T12	F96T12, HO, VHO	950	--					
	F40T12, F40U	950	950					
	F48T12/HO	1025						
	F28 2D/4P	1100	1100					
2D 4-pin	F38 2D/4P	1000	1100					

¹120 minute run time ²2-lamp operation for linear T8, T10 and T12 only

³Does not have compatibility with End-of-Lamp-Life feature

