



LZR™ Series

Architectural/commercial design
High-performance, halogen lamp
remote lighting fixtures.

Patent Pending




Features

- Easy to install
- 6- and 12-volt models
- Semi-recessed “eyeball” style lighting heads
- Finger-touch lamp aiming
- Four position housing orientation on back plate
- Universal mounting back plate
- Tandem models can be mounted vertically or horizontally
- High-output halogen lamps provided standard
- All models offer a choice of 5- or 10-watt lamps
- Lamps provided standard with integral, clear glass, protective lens
- UV-stable thermoplastic housing
- White or black finishes offered
- Operating Temperature Range -5°C to 40°C (41°F to 104°F)
- All models are UL Listed for damp location applications

Product Selector

White		Black		Voltage	Wattage
Single	Tandem	Single	Tandem		
LZRSW0605	LZRDW0605	LZRSB0605	LZRDB0605	6	5
LZRSW0610	LZRDW0610	LZRSB0610	LZRDB0610	6	10
LZRSW1205	LZRDW1205	LZRSB1205	LZRDB1205	12	5
LZRSW1210	LZRDW1210	LZRSB1210	LZRDB1210	12	10

Dimensions

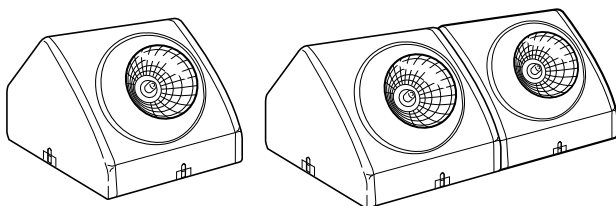

Dimensions

Single: 4³/₄" (12 cm) wide x 4³/₄" (12 cm) long x 3¹/₂" (8.9 cm) high
Tandem: 4³/₄" (12 cm) wide x 9¹/₂" (24 cm) long x 3¹/₂" (8.9 cm) high

Specifications

Construction


Unit and Lamp Housings: Housing and back plate constructed of flame-rated, UV-stable, impact-resistant thermoplastic
Finish: Textured bright white or black

Illumination

Lamp Type: Halogen MR-16 package
Lamp Voltage: 6- or 12-volts
Standard Lamp Wattage: 6V, 5 or 10W; 12V, 5 or 10W
Rated Lamp Life: 100 hours (all)

Photometrics

High-Output Halogen Lamp (Horizontal Isofootcandle Distribution)

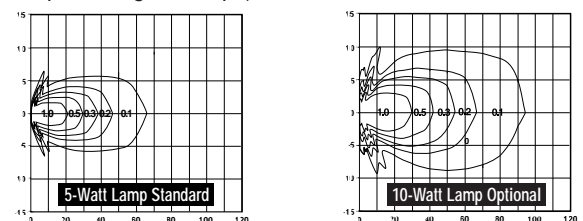

Note: A 10% variance in isofootcandle distribution may be experienced

Installation

Unit Mounting: Mounts to standard electrical boxes using universal mounting plate provided. Fixture housing mounts to back plate in a choice of four positions. Housing secured using locking screws provided.

Wiring: Pigtail leads are provided for lamp connections.

Compliances

UL 924 and NFPA-101 (all models)
 UL Damp Location Listed

Warranty

Fixture (Excluding Lamp): 3 years full

Suggested Specifications

Unit housing and back plate shall be constructed of flame-rated, UV-stable, impact-resistant thermoplastic in textured (white) (black) finish. Remote fixture illumination will be provided by (one) (two) (6-volt)(12-volt),(5-watt)(10-watt) halogen lighting heads. Lamps shall be capable of providing 1 footcandle of illumination at ___ feet. A universal knockout pattern shall be provided in the unit back plate for mounting to standard utility boxes. Units must comply with all UL 924, UL Damp Location and NFPA 101 Life Safety Code requirements.

Dimensions To Be:

Single: 4³/₄" (12 cm) wide x 4³/₄" (12 cm) long x 3¹/₂" (8.9 cm) high
Tandem: 4³/₄" (12 cm) wide x 9¹/₂" (24 cm) long x 3¹/₂" (8.9 cm) high



Hubbell Lighting, Inc.

Dual-Lite • www.dual-lite.com

A Hubbell Lighting, Inc. brand with representatives' offices in principal cities throughout North America.

Copyright © Hubbell Lighting, Inc., All Rights Reserved • Specifications subject to change without notice. • Printed in U.S.A.

0601555 7/05